

Product Summary

The WSF12N10G use advanced SGT MOSFET technology to provide low RDS(ON), low gate charge, fast switching and excellent avalanche characteristics. This device is specially designed to get better ruggedness and suitable to use in.

Product Summary

BVDSS	RDSON	ID
100V	125mΩ	12A



Applications

- Consumer electronic power supply
- Motor control
- Synchronous-rectification
- Isolated DC

Features

- Low RDS(ON)
- Low gate charge
- Fast switching

TO-252 Pin Configuration



Absolute Maximum Ratings at Tj=25°C unless otherwise noted


Symbol	Parameter	Value	Unit
VDS	Drain source voltage	100	V
VGS	Gate source voltage	±20	V
ID	Continuous drain current1)	TC=25 °C 12	A
ID, pulse	Pulsed drain current2)	TC=25 °C 24	A
PD	Power dissipation3)	TC=25 °C 16.9	W
EAS	Single pulsed avalanche energy	Note5) 1.2	mJ
Tstg, Tj	Operation and storage temperature	-55 to 150	°C
RθJC	Thermal resistance, junction-case	7.4	°C/W
RθJA	Thermal resistance, junction-ambient	Note4) 62	°C/W

Electrical Characteristics at T_j=25 °C unless otherwise specified

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-source breakdown voltage	V _{GS} =0 V, I _D =250 μA	100	111	-	V
V _{GS(th)}	Gate threshold voltage	V _{DS} =V _{GS} , I _D =250 μA	1.2	2.0	2.5	V
R _{DS(ON)}	Drain-source on-state resistance	V _{GS} =10 V, I _D =5 A	-	105	125	mΩ
R _{DS(ON)}	Drain-source on-state resistance	V _{GS} =4.5 V, I _D =3 A	-	115	145	mΩ
I _{GSS}	Gate-source leakage current	V _{GS} =20 V	-	-	100	nA
		V _{GS} =-20 V	-	-	-100	
I _{DSS}	Drain-source leakage current	V _{DS} =100 V, V _{GS} =0 V	-	-	1	μA
C _{iss}	Input capacitance		-	206.1	-	pF
C _{oss}	Output capacitance	V _{GS} =0 V, V _{DS} =50 V, f=100 kHz	-	28.9	-	pF
C _{rss}	Reverse transfer capacitance		-	1.4	-	pF
t _{d(on)}	Turn-on delay time		-	14.7	-	ns
t _r	Rise time	V _{GS} =10 V, V _{DS} =50 V, R _G =2 Ω, I _D =5 A	-	3.5	-	ns
t _{d(off)}	Turn-off delay time		-	20.9	-	ns
t _f	Fall time		-	2.7	-	ns
Q _g	Total gate charge		-	4.3	-	nC
Q _{gs}	Gate-source charge	I _D =5 A, V _{DS} =50 V, V _{GS} =10 V	-	1.5	-	nC
Q _{gd}	Gate-drain charge		-	1.1	-	nC
V _{plateau}	Gate plateau voltage		-	5.0	-	V
I _S	Diode forward current	V _{GS} <V _{th}	-	-	7	A
I _{SP}	Pulsed source current		-	-	21	
V _{SD}	Diode forward voltage	I _S =7 A, V _{GS} =0 V	-	-	1.0	V
t _{rr}	Reverse recovery time	I _S =5 A, di/dt=100 A/μs	-	32.1	-	ns
Q _{rr}	Reverse recovery charge		-	39.4	-	nC
I _{rrm}	Peak reverse recovery current		-	2.1	-	A

Note:

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3) P_d is based on max. junction temperature, using junction-case thermal resistance.
- 4) The value of R_{θJA} is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with T_a=25 °C.
- 5) V_{DD}=50 V, R_G=50 Ω, L=0.3 mH, starting T_j=25 °C.

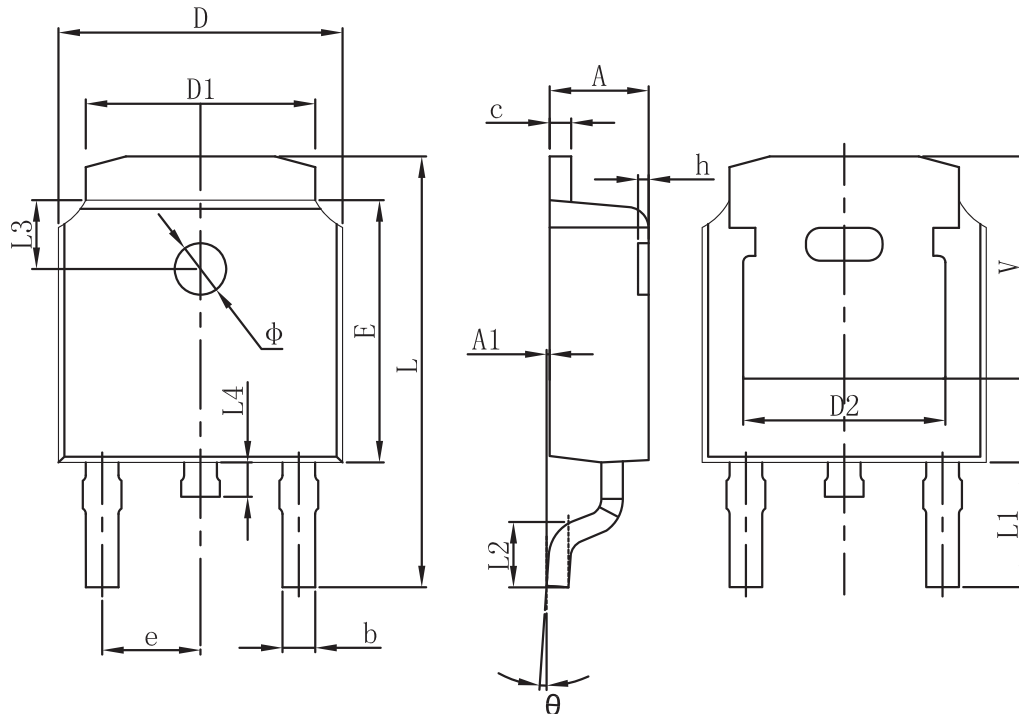Packaging information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	



Attention

- 1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.
- 2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.
- 3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- 4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- 5, In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- 6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.
- 7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- 8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you intend to use.
- 9, this catalog provides information as of Sep. 2014. Specifications and information herein are subject to change without notice.